


Electricity Traceability (|) DC

Korea Research Institute of Standards and Science

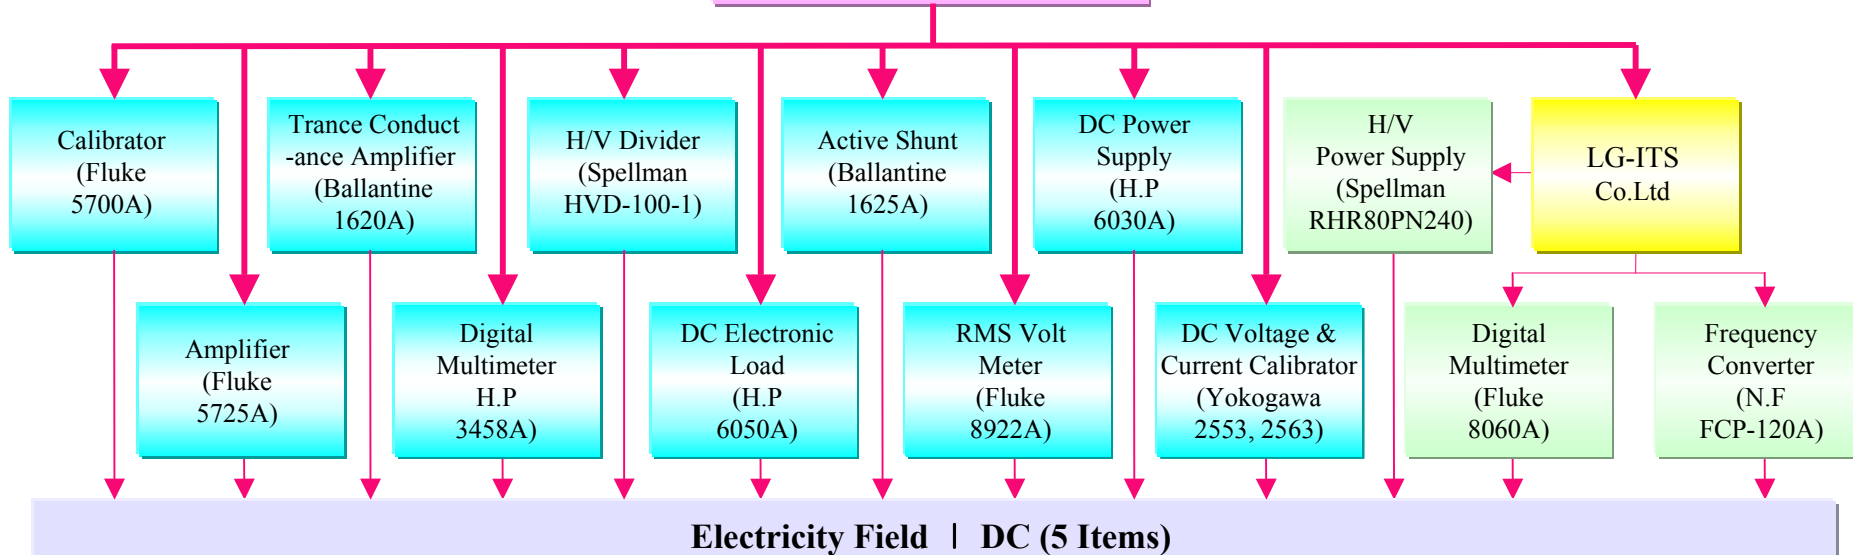


Electricity - DC

Item		Range		BMC		Item		Range		BMC	
DC Voltammeter		3 μ A ~	30 A	12 nA ~	57 mA	DC Voltage & Current Calibrator	10 mV ~	10 V	0.60 μ V ~	0.53 mV	
		3 V ~	1000 V	4.7 mV ~	2.4 V		1 mA ~	100 mA	68 nA ~	6.6 μ A	
Multi Meter	DC	190 μ A ~	9 A	21 nA ~	3.6 mA		Kilovolt Meter	-200 $^{\circ}$ C ~	1400 $^{\circ}$ C	0.017 $^{\circ}$ C ~	0.12 $^{\circ}$ C
		-1.9 V ~	1000 V	1.6 μ V ~	13 mV			1 kV ~	40 kV	4.7 V ~	39 V
	AC	190 μ A ~	9 A	50 nA ~	8.7 mA	DC Power Supply	1 mA ~	4 mA	24 μ A ~	29 μ A	
		190 mV ~	700 V	31 μ V ~	0.12 V		0 V ~	200 V	0.48 mV ~	47.5 mV	
	Resistor		19 Ω ~	19 M Ω	0.75 m Ω ~	10 k Ω	1 A ~	15 A	0.58 mA ~	6.1 mA	

Electricity Traceability (Ⅱ) AC & Power

Korea Research Institute of Standards and Science

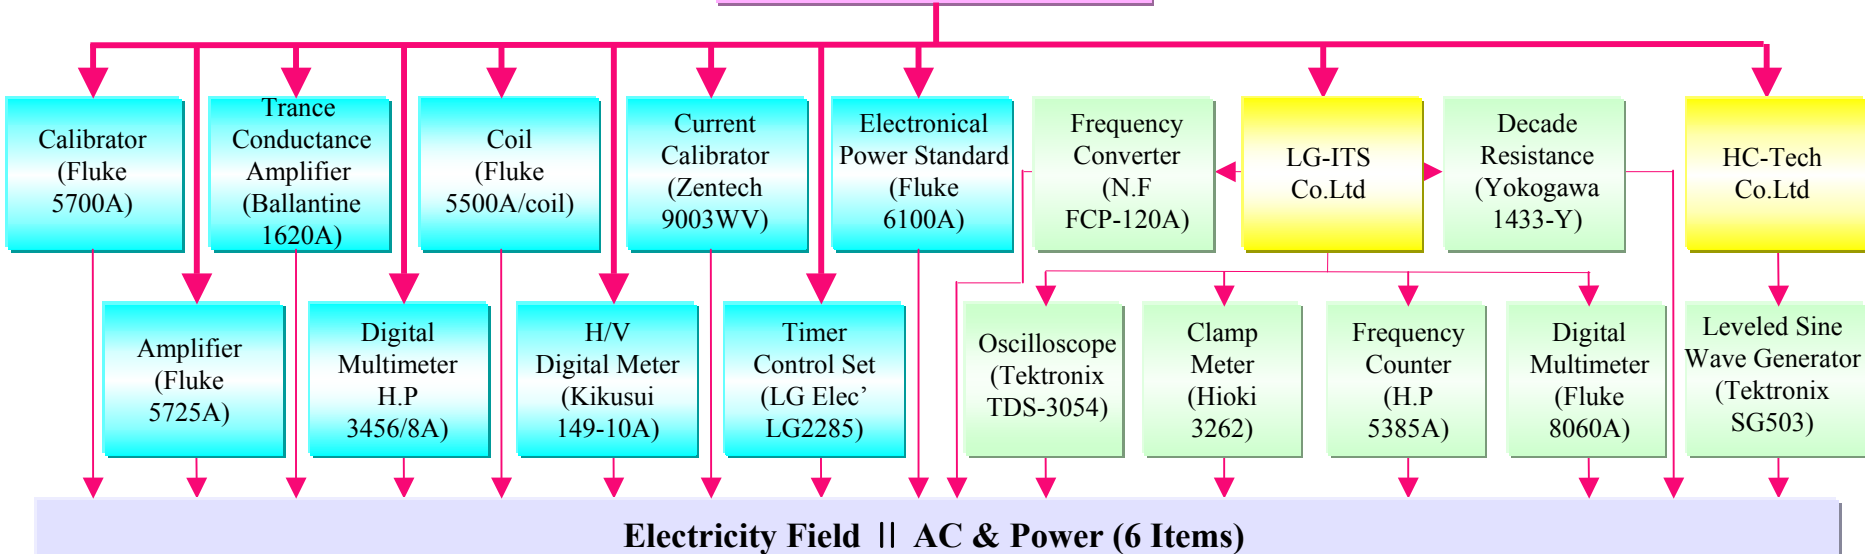


Electricity – AC & Power

Item		Range	BMC	Item	Range	BMC
Volt Ammeter		0.15 A ~ 10 A	0.24 mA ~ 24 mA	AC RMS Voltmeter	1 mV ~ 300 V	6 μ V ~ 1.2 V
		30 V ~ 750 V	48 mV ~ 1.2 V	Puncture	0.5 kV ~ 5 kV	15 V ~ 63 V
Clamp Meter	DC	10 mA ~ 2 A	6.4 μ A ~ 3.9 mA			0 s ~ 10 s
	AC	10 mA ~ 500 A	82 μ A ~ 0.87 A	AC Power Supply	0 V ~ 240 V 2 A ~ 10 A	2.4 V ~ 2.8 V 0.14 A ~ 0.18 A
	Voltage & Resistor	0 V ~ 1000 V 2 k Ω ~ 10 k Ω	48 mV ~ 480 mV 29 Ω ~ 136 Ω	Wattmeter	10 V ~ 600 V 0.1 A ~ 10 A 10 W ~ 1000 W	1.1 mV ~ 75 mV 27 μ A ~ 5.8 mA 4.8 mW ~ 482 mW

Electricity Traceability (III) C, R & L

Korea Research Institute of Standards and Science

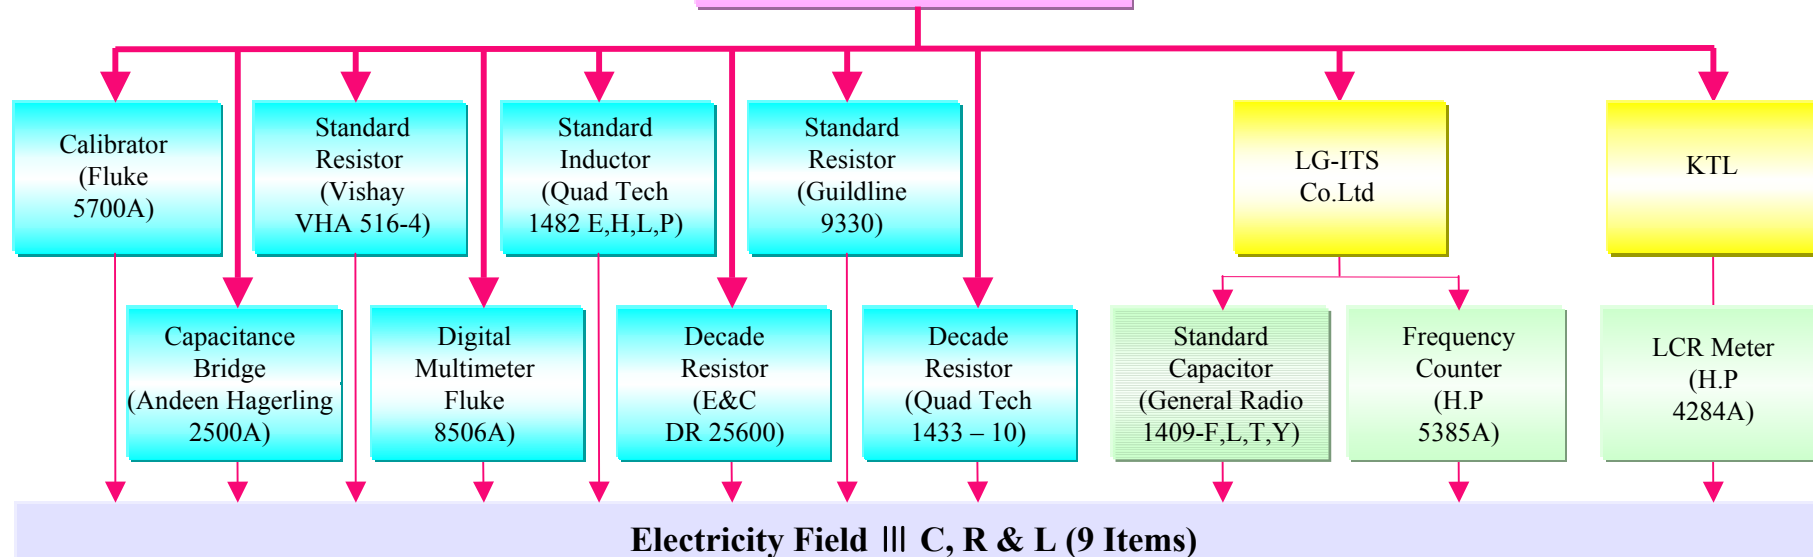


Electricity Field III C, R & L (9 Items)

Electricity – C, R & L

Item	Range	BMC	Item	Range	BMC
Standard Capacitance	1 pF ~ 1000 nF	45 aF ~ 65 pF	Decade Resistor	10 Ω ~ 100 MΩ	2.4 mΩ ~ 20 kΩ
Decade Capacitor	1 pF ~ 1000 nF	76 aF ~ 76 pF	Mega Ohm Tester	1 MΩ ~ 10 GΩ	1.5 kΩ ~ 95 MΩ
Capacitance Indicator	1 nF ~ 1 μF	0.49 pF ~ 0.49 nF	Ohm Meter	100 mΩ ~ 100 kΩ	16 μΩ ~ 16 Ω
Impedance Bridge	10 Ω ~ 100 kΩ	0.67 mΩ ~ 6.7 Ω	Earth Tester	1 Ω ~ 1000 Ω	28 mΩ ~ 11 Ω
	1 mH ~ 1 H	0.16 μH ~ 0.16 mH	Decade Inductor	1 mH ~ 1 H	0.97 μH ~ 0.60 mH
	1000 pF ~ 1000 nF	0.15 pF ~ 0.15 nF			

Electricity Traceability (IV) Electronic Measurement

Korea Research Institute of Standards and Science

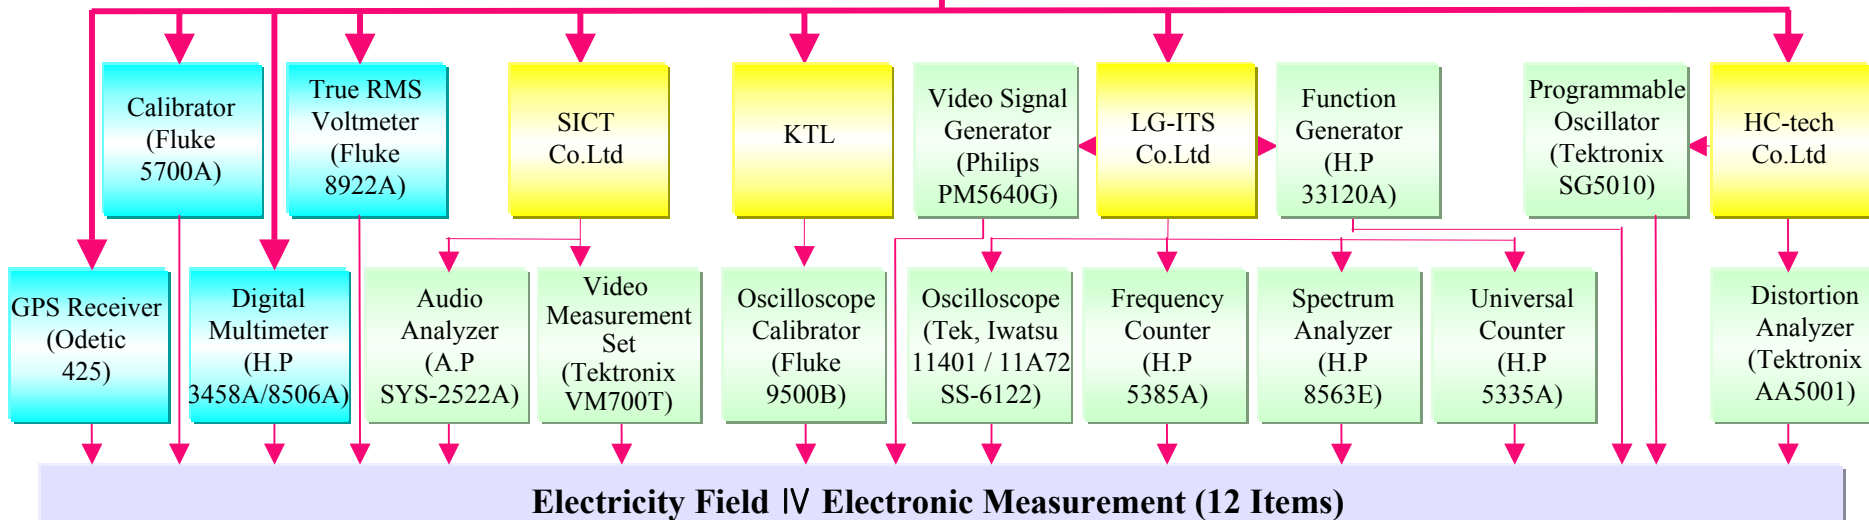

Electricity – Electronic Measurement

Item	Range	BMC	Item	Range	BMC	Item	Range	BMC
Audio Signal Generator	0 Hz ~ 1 MHz	0.47 Hz ~ 47 Hz	Low Frequency Analyzer	10 Hz ~ 100 kHz	0.74 mV ~ 2.2 mV	Spot Generator	0 Hz ~ 19 kHz	47 mHz ~ 4.7 Hz
Test Oscillator	10 Hz ~ 10 MHz	24 mHz ~ 62 kHz	Function Generator	100 kHz ~ 15 MHz	4.8 mHz ~ 0.48 Hz	Video Signal Generator	60 Hz ~ 100 kHz	4.7 μHz ~ 4.7 mHz
Oscilloscope	6 mV ~ 200 V 0.5 ns ~ 50 s	54 μV ~ 2.4 V 2.3 ps ~ 0.23 s	Color Pattern Generator	3.579 545 MHz 4.433 618 MHz	0.09 Hz 0.09 Hz	Distortion Meter	0 Hz ~ 100 kHz	5 mV
Distortion Analyzer	10 Hz ~ 600 kHz 1 mV ~ 300 V	59 mHz ~ 2.4 kHz 4.5 μV ~ 1.2 V	Variable Filter	10 Hz ~ 100 kHz	95 μHz ~ 0.95 Hz	LF Amplifier	1000 mV	3.3 mV